


| Art.nr | El.nummer | Farge            | RAL  |
|--------|-----------|------------------|------|
| 1479GA | 3120021   | GALVANISERT STÅL | -    |
| 1479B  | 3120022   | SORT             | 9005 |

## Generell informasjon

|                                   |                               |
|-----------------------------------|-------------------------------|
| Type armatur                      |                               |
| Materiale                         | Galvanisert stål              |
| Avdeknings materiale/optikk       | PMMA, opal                    |
| Type lyskilde                     | LED modul AC                  |
| Lysstyring                        | Dimbar (Triac)                |
| Netto / Brutto vekt armatur       | 9,8kg / 9,8kg                 |
| Forpakkingsstørrelse [cm]         | 21x21x57                      |
| LED                               | Lumens EDC/47C/10W/830/230V/A |
| Effekt W                          | 10W                           |
| Armatureffekt                     | 10W                           |
| Modul lumen                       | 900lm                         |
| Lumen ut                          | 136lm                         |
| Modul effektivitet                | 90lm/W                        |
| Armatur Lumen/Watt                | 13,6lm/W                      |
| Fargetemperatur                   | 3000K                         |
| Farvekonsistens (McAdam-Ellipse)  | SDCM3                         |
| Fargegjengivelsesindeks           | 80                            |
| Beregnet levetid L70/B50 ved 25°C | 50 000h                       |
| Energieffektivitetsindeks (EEL)   | <b>A+</b>                     |
| Virkningsgrad                     | PF > 0,99                     |
| Ta nominal:                       | +25°C                         |
| Inrush current                    | 46,1mA/500µs                  |

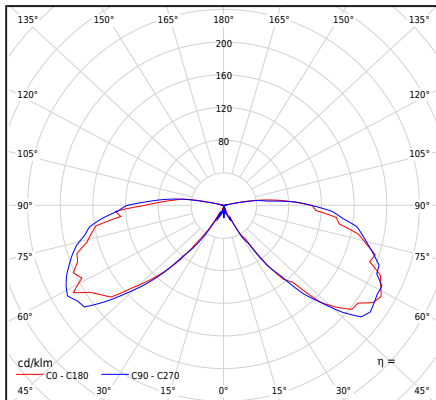

## Filer som kan lastes ned

Photometric LDT files, Photometric IES files, Manual

